

For Professional NDT

PROUV50

LED UV-A Inspection Flashlights



365±5 nm

Optimized UV-A spectrum



213g weight

Compact and durable,
easy to carry



0 sec start-up

Instant full brightness,
no pre-heating required



50,000 lifespan

Long-lasting and
stable performance



3.7V 3000mAh

Rechargeable battery
Long-lasting battery life



UV-A Lenses



Battery
Placement



Lightweight
Easy to hold



ON/OFF Button

PROMAG
NDT
The Most Reliable MT & PT Equipment Supplier



RRES 90061



AIRBUS
AITM 6-1001



ASTM E3022



EN ISO 3059



AMS 2647

PROUV50 SERIES

P/N	Type	UV-A Intensity at 15 in (38 cm) (μW/cm²)	UV-A Coverage Area at 15 in (38 cm) at minimum 1000 μW/cm²	RRES 90061	AITM 6-1001	ASTM E3022
P7310	PROUV 50	<5,000	Ø 6.3 ± 0.4 in (16cm ± 1cm)	V	V	V

Technical Data

Power Supply	Battery
Light Source	LED UV-A
Length	16 cm (6.3 in)
Outer Diameter	3.5 cm (1.38 in)
UV Filter Diameter	2.4 cm (0.94 in)
Weight	213 g (0.47 lb) (with battery pack)
Power Requirements	Rechargeable Battery
Battery Pack	Type: Rechargeable battery Run time: 2 hours continuous Full Charge Time: approx. 3 hours

*The outcome may vary depending on the actual usage conditions.

*Once the product be disassembled, the warranty is void.






Standard Set

- ① LED UV-A Flashlight x1
- ② Battery Charger Cord (1m) x1
- ③ Battery Charger x1
- ④ Rechargeable Battery x1
- ⑤ UV-A Goggles x1
- ⑥ Carry Case x1

UV-A Beam Profiles

PROUV 50.

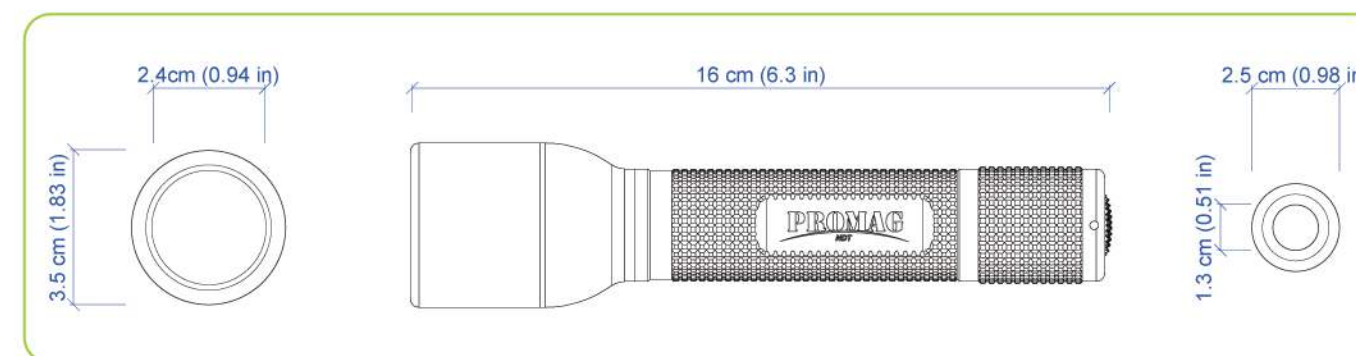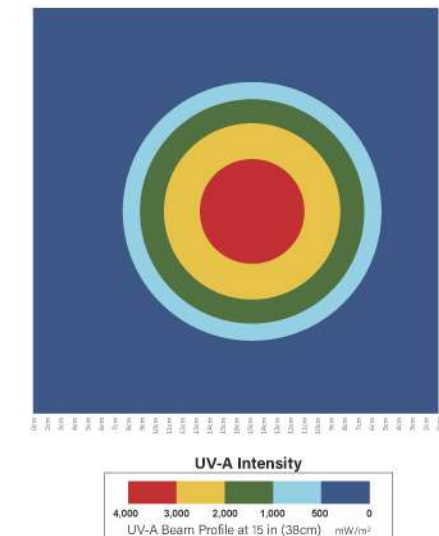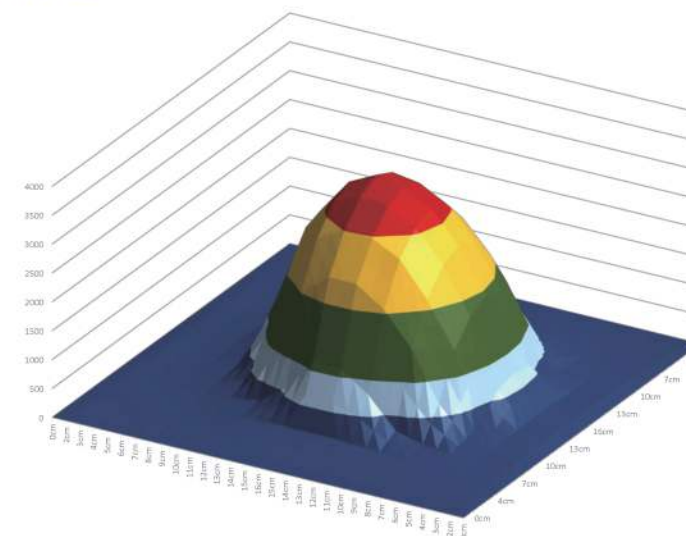

View information