

For Professional NDT

VICTORY I

LED UV-A HANDHELD LAMPS / WHITE LIGHT LAMPS



600g weight

Compact and durable,
easy to carry



4 UV-A LEDs

High-intensity UV-A
illumination



2 Key Designs

Durable and Robust
Stable Inspection



20,000 lifespan

Long-lasting and
stable performance



2 power modes

Supports both battery
and AC power sources



Accessories
Mounting Hole



Cooling by a
built-in fan



High/low Intensity
Change-over Switch



Battery
Display



3-Position
Switch



PROMAG
NDT
The Most Reliable MT & PT Equipment Supplier



RRES 90061



AIRBUS
AITM 6-1001



ASTM E3022



EN ISO 3059



AMS 2647



View information

VICTORY I SERIES

P/N	Type	UV-A Intensity at 15 in (38 cm) ($\mu\text{W}/\text{cm}^2$)	UV-A Coverage Area at 15 in (38 cm) at minimum 1000 $\mu\text{W}/\text{cm}^2$	RRES 90061	AITM 6-1001	ASTM E3022
P7110	VIC1-AS1 (UV-A Only)	<5,000	$\varnothing 7.87 \pm 0.4$ in (20cm ± 1 cm)	V	V	V
P7111	VIC1-AS (UV-A + WH)	<5,000	$\varnothing 7.87 \pm 0.4$ in (20cm ± 1 cm)	V	V	V
P7113	VIC1-SD (UV-A + WH)	$\geq 8,000$	$\varnothing 6.7 \pm 0.4$ in (17cm ± 1 cm)			V

*If you request for only mains powered, please email us.

Technical Data

Power Supply	Mains powered & Battery
Light Source	LED UV-A & White Light LED
Dimension (L x W x H)	14 x 6.5 x 18 cm / 5.5 x 2.56 x 7.09 in
Weight	600 g (1.3 lb) (with battery pack)
Visible Light in UV-A Mode at 15 in (38cm)	≤ 2 foot-candles (20 lux)
Visible Light Intensity in Visible Mode (38cm)	20 foot-candles (200 lux)
Power Requirements	90-240 VAC
Battery Pack	Type: Bosh 12V, Li-ion rechargeable battery Run time: 1.5 hours continuous Full Charge Time: approx. 4 hours

*The outcome may vary depending on the actual usage conditions.

*Once the product be disassembled, the warranty is void.



Standard Set



- LED UV-A Lamp x1
- UV-A Goggles x1
- Power Adapter (1.5m) x1
- Bosch Battery 2.0 x1
- Carry Case x1

Optional

- Phone / Camera holder
- Shoulder strap
- Bosch Battery 6.0
Running time: 3.5 hours
Charging time: 6 hours
- Battery charger
- UK-PLUG
- Power Cord (3m)

UV-A Beam Profiles

VIC-AS.

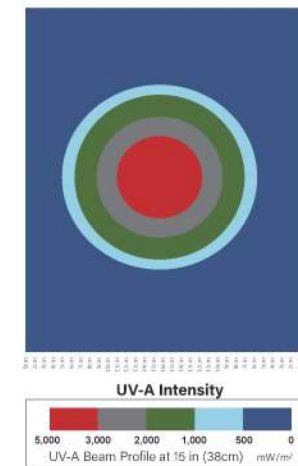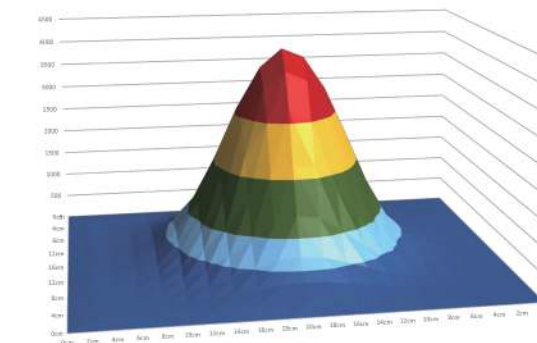

VIC-SD.

