

For Professional NDT

# VICTORY II

LED UV-A HANDHELD LAMPS / WHITE LIGHT LAMPS



## IP64 rating

Dust-tight & water-resistant for field durability



## Meets 4 standards

major international standards compliance



## 2 Key Designs

Durable and Robust  
Stable Inspection



## 20,000 lifespan

Long-lasting and stable performance



## 600g weight

Compact and durable, easy to carry



High-intensity  
UV-A illumination



Fanless Design



Battery or AC power  
for maximum flexibility



Battery  
Display



3-Position  
Switch



**PROMAG**  
NDT  
The Most Reliable MT & PT Equipment Supplier



RRES 90061



AIRBUS  
AITM 6-1001



ASTM E3022



EN ISO 3059



SAE  
AMS 2647



View information

## VICTORY II SERIES

| P/N     | Type                 | UV-A Intensity at 15 in (38 cm) ( $\mu\text{W}/\text{cm}^2$ ) | UV-A Coverage Area at 15 in (38 cm) at minimum 1000 $\mu\text{W}/\text{cm}^2$ | RRES 90061 | AITM 6-1001 | ASTM E3022 |
|---------|----------------------|---------------------------------------------------------------|-------------------------------------------------------------------------------|------------|-------------|------------|
| P7110-2 | VIC2-as1 (UV-A Only) | <5,000                                                        | $\varnothing 6.7 \pm 0.4$ in ( 17cm $\pm 1$ cm )                              | V          | V           | V          |
| P7111-2 | VIC2-as (UV-A + WH)  | <5,000                                                        | $\varnothing 6.7 \pm 0.4$ in ( 17cm $\pm 1$ cm )                              | V          | V           | V          |
| P7113-2 | VIC2-sd (UV-A + WH)  | $\geq 8,000$                                                  | $\varnothing 6.7 \pm 0.4$ in ( 17cm $\pm 1$ cm )                              |            |             | V          |

\*If you request for only mains powered, please email us.

### Technical Data

|                                                |                                                                                                             |
|------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| Power Supply                                   | Mains powered & Battery                                                                                     |
| Light Source                                   | LED UV-A & White Light LED                                                                                  |
| Dimension (L x W x H)                          | 14 x 6.5 x 18 cm / 5.5 x 2.56 x 7.09 in                                                                     |
| Weight                                         | 600 g (1.3 lb) (with battery pack)                                                                          |
| Visible Light in UV-A Mode (38cm)              | $\leq 2$ foot-candles (20 lux)                                                                              |
| Visible Light Intensity in Visible Mode (38cm) | 20 foot-candles (200 lux)                                                                                   |
| Power Requirements                             | 90-240 VAC                                                                                                  |
| Battery Pack                                   | Type: 12V, Li-ion rechargeable battery<br>Run time: 3 hours continuous<br>Full Charge Time: approx. 6 hours |

\*The outcome may vary depending on the actual usage conditions.

\*Once the product be disassembled, the waterproof warranty is void.



#### Standard Set



- LED UV-A Lamp x1
- UV-A Goggles x1
- Power Adapter (1.5m) x1
- PROMAG Battery 3.0 x1
- Carry Case x1

#### Optional

- Bosch Battery 6.0  
Running time: 3.5 hours  
Charging time: 6 hours
- Battery Charger
- UK-PLUG
- Power Cord (3m)

### UV-A Beam Profiles

VIC-as.

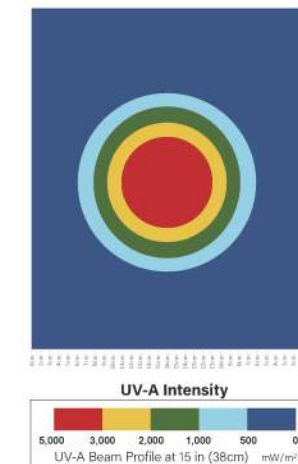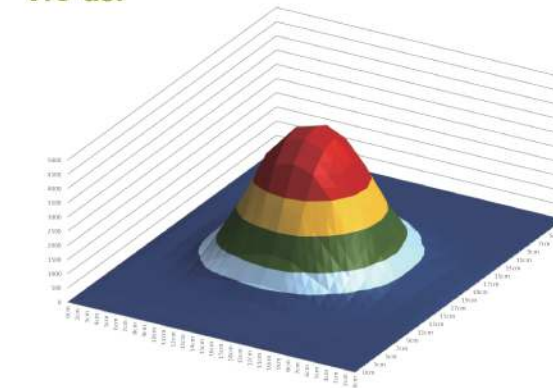

VIC-sd.

